


RT-Sincere, Responsible, Young
CE, RoHS, FCC, CB, ETL Certificated

Specification




	P1.86	P2	P2.5
Pixel Pitch	1.86mm	2mm	2.5mm
Density	289,050 dots/m ²	250,000 dots/m ²	160,000 dots/m ²
Led Type	SMD1515	SMD1515	SMD1515/SMD2121
Drive Method	1/43 Scan	1/40 Scan	1/32 Scan
Panel Resolution	344 x 258 dots	320 x 160 dots	256 x 128 dots
Best Viewing Distance	1.8 - 18m	2 - 20m	2.5 - 25m
Brightness	900 nits		
Input Voltage	AC110V/220V ±10%		
Panel Material	Die Casting Aluminum		
Screen Weight	7KG		
Panel Size	640 x 480mm		
Max Power Consumption	800W		
Average Power Consumption	300W		
Application	Indoor		
Maintenance Way	Front Service		
Life Span	100,000 Hours		



RTLED - Fine Pitch 640x480mm

640mm x 480mm fine pitch LED display can make P1.86, P2, P2.5 pixel pitch, it can use for different indoor application, such as meeting room, monitor room, studio.

front maintenance led screen

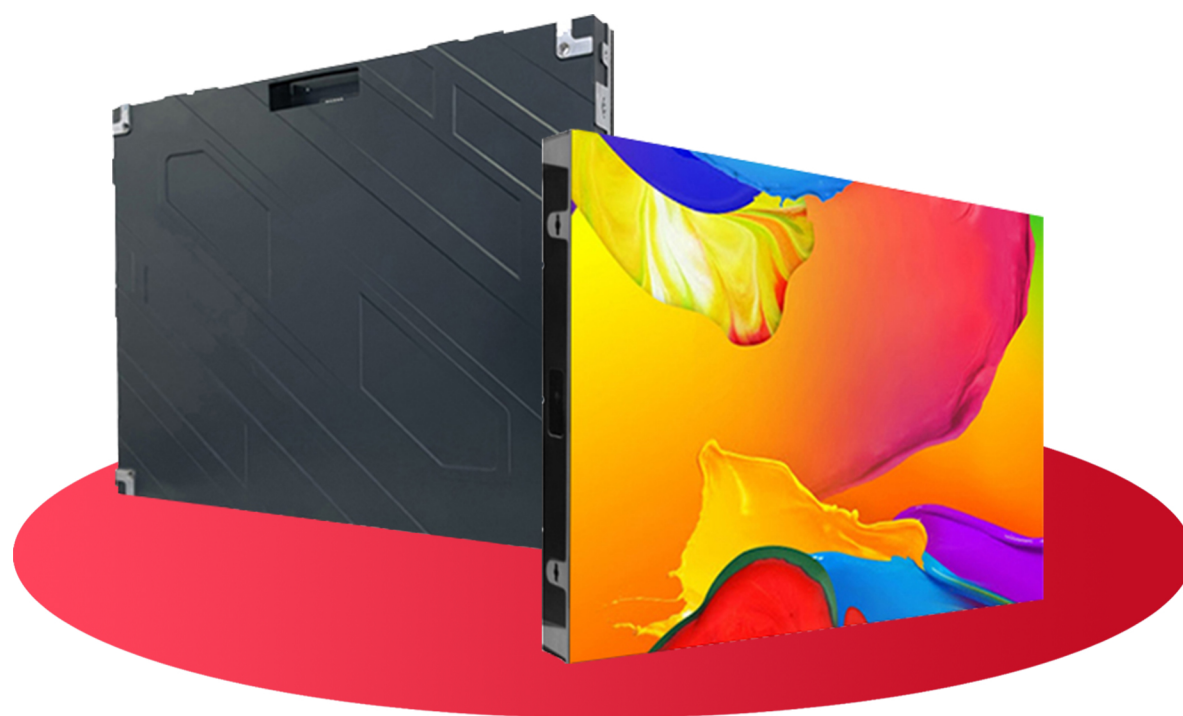



SHENZHEN RENTALLED PHOTOELECTRIC TECHNOLOGY CO., LTD.
Tel: 0086-755-29792143 Mobile/WhatsApp: 0086-13510835945
Address: 2F, Anda Electronic Technology Park, Bao'an District, Shenzhen, China

4K Studio/ Home Theater
P1.86 / P2 / P2.5


RTLED - Fine Pitch 640x480mm

RTLED 640x480mm fine pitch LED display main pixel pitch is P1.86, P2, P2.5. Different with traditional fixed LED cabinet, it can be installed fast with fast locks and direct power cable connection. Besides, it can be installed on wall directly with some screws, no need steel structure. It save space and labor cost.

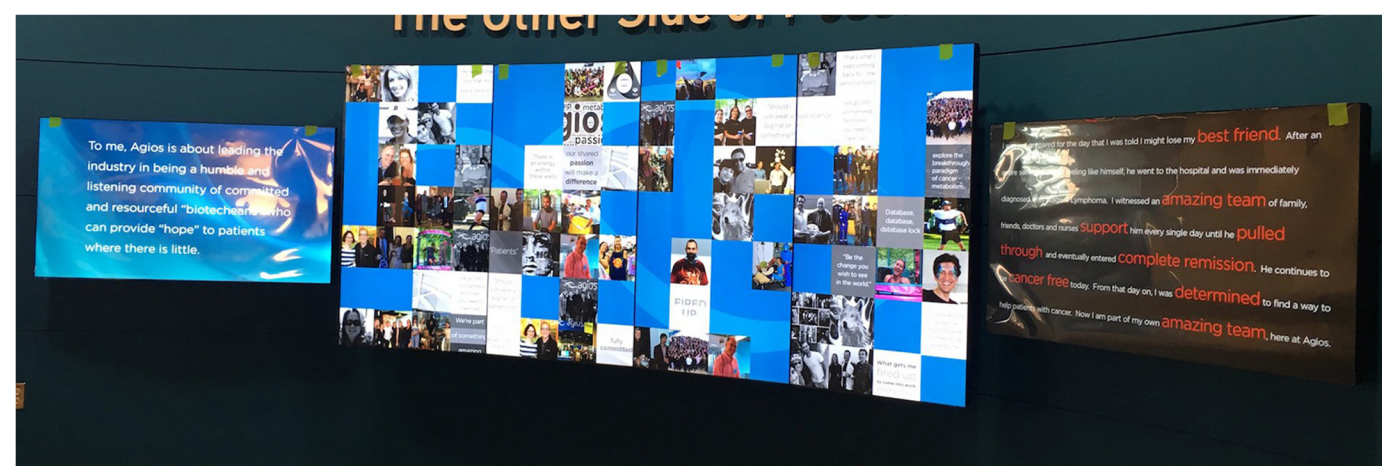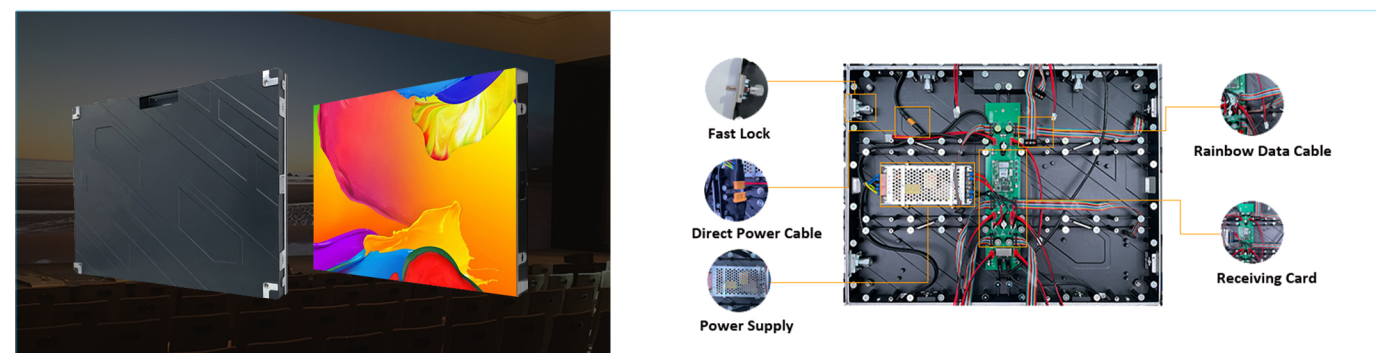


INSTALLATION AND MAINTENANCE

- 1, Fixed empty LED cabinet on wall by screws.
- 2, Assemble power supplies, receiving cards and cables.
- 3, Paste LED modules on LED cabinets.
- 4, Maintain LED screen.

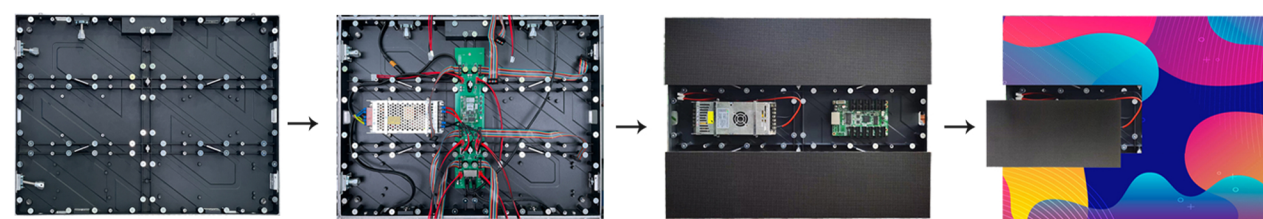


FRONT MAINTENANCE

The LED panel is completely front maintenance, LED modules are pasted by magnets. Just need a vacuum tool to remove LED modules, then can maintain cables, receiving cards and power supplies.

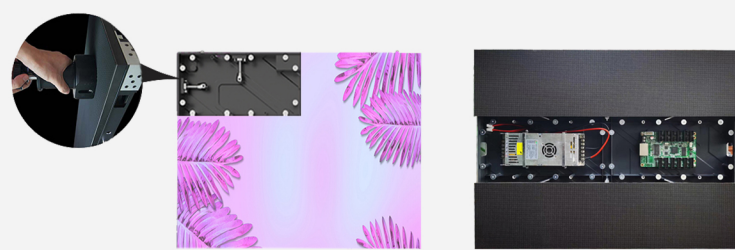

ADVANTAGES

- 1, RTLED use direct power cable, it is just like powerCon, very easy to insert and pull out.
- 2, RTLED use rainbow data cables, its quality is better than white data cables.

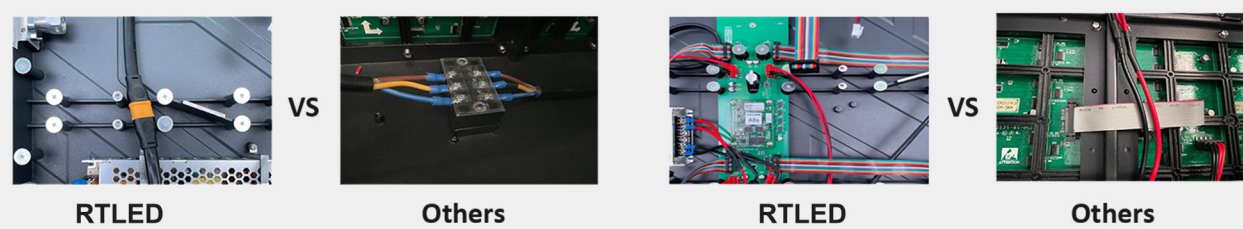

RTLED

Others

RTLED

Others

THIN AND LIGHT WEIGHT

With only 59mm thickness and 7 KG/pc weight, the LED panel is portable and easy to install.

